



The TextLight Cellular Alarm Light

Why buy an ordinary alarm light when no one is there to see? TextLight remotely notifies you of critical events!

The TextLight is perfect for any application that requires an alarm light. It is an affordable and reliable monitoring solution. Unlike traditional alarm lights, the TextLight delivers real-time alert notifications by sending text messages to up to three mobile devices. Utilize the TextLight's simple and effective design to monitor diverse applications, such as pump stations, irrigation systems, electrical control panels, and more.



Applications

PumpAlarm.com's TextLight is applicable to lift stations, pump stations, treatment plants, electrical control panels, plus other applications in need of an alarm light. It proves that regulation compliance doesn't have to cost big bucks. This Combination Visual Alarm Beacon and Cellular Transmitter will text you if an alarm condition is detected. Plus it can be installed in about an hour, requiring only basic wiring knowledge.

Kit Includes

- (1) 120V TextLight Alarm
- (4) Stainless steel screw & nut
- (1) Control panel gasket
- (4) Silicone sealing washers
- (1) Snap bushing
- (1) Battery with mounting bracket
- (1) 6ft. wiring harness

Features

- Super Bright LEDs ensure you can see any alarms in addition to receiving text messages.
- Standard on the Verizon Cellular Network.
- Comes with the 4G/LTE Modular Radio.
- 120V & 12V version available.
- NEMA 4x equivalent rating for direct mounting indoors or outdoors.
- Complete install and setup in about an hour with a 6 ft. field wiring harness for easy electrical connection.
- 2 Input alarm channels: (1) voltage driven channel, (1) dry contact channel.

Order Information


TextLight 120VAC Part Number: U-TXTLT-12VAC
TextLight 12VDC Part Number: U-TXTLT-12VDC



Specifications

- Dual input alarm channels: (1) 12VAC/VDC to 120VAC/VDC, opto-isolation (1) dry contact input channel
- Backup battery: External 6 VDC sealed lead, 1.3 AH rechargeable
- Operating temperature: -20 to 150 F
- Operating humidity: 0-90% RH, non-condensing
- Alarm light bulb: Super bright LED cluster long-life
- Alarm light state: Pulses at 3Hz when input is in alarm
- Cellular radio: 4g LTE CAT -1
- Certifications: FCC parts 15, 22, 24; RoHS compliant; IC: RSS-132 & 133
- Antenna: Integrated, on board
- Input power: 120VAC +/-20% @ 0.5 max, or 12VDC option
- Enclosure: NEMA 4x equivalent rating for direct mounting indoors or outdoors
- Dimensions: 5" W round base x 5.9" H
- Weight: 2.5 pounds
- Protection: US patent # 7, 228, 129, and # 7, 778, 633

Wiring

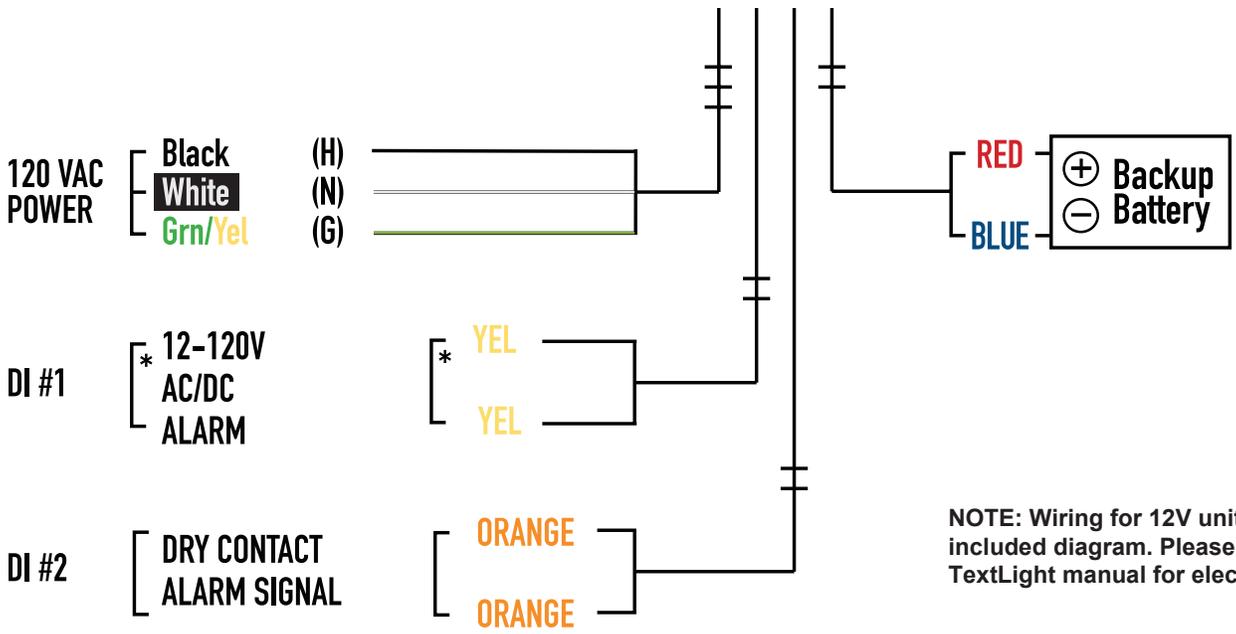

NOTE: Wiring for 12V unit will differ from included diagram. Please reference TextLight manual for electrical wiring diagram.

* Voltage present / absent indicates alarm / normal condition